

FOURTH FLOOR FRAMING PLAN
 1/8" = 1'-0"

ALL FLOOR FRAMING MEMBERS ARE 16" DEEP PARALLEL CHORD TRUSSES SPACED AT 24" UNLESS NOTED OTHERWISE.
 FLOOR TRUSS LOADING CRITERIA:
 TOP CHORD
 DEAD LOAD 10 PSF
 LIVE LOAD 40 PSF
 BOTTOM CHORD
 DEAD LOAD 10 PSF



FLOOR SHEATHING IS 3/4" ADVANTECH.
 TOP OF SHEATHING ELEVATION = 104'-3"

BEARING WALLS ARE 2x6@ 16".
 BEARING WALL HEADERS ARE (3)2x8 WITH 2 JACK STUDS AT WINDOWS AND SINGLE DOORS UNLESS NOTED.

LOOSE LINTEL AT CMU WINDOWS AND DOORS IS (2) L 4x3 1/2x5/16 LLV


INDICATES SHEARWALL. SEE S2.03.

SEE S0.01 FOR FRAMING HARDWARE SCHEDULE.

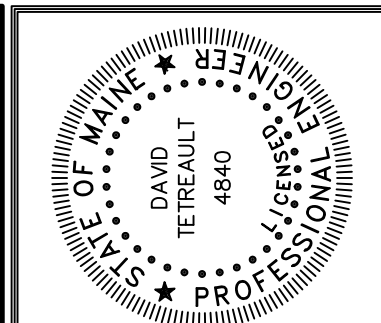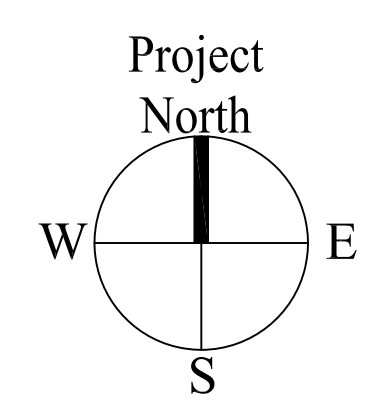

Prepared For:
WESTBROOK DEVELOPMENT CORPORATION
 MILLBROOK ESTATES II, LP
 30 Liza Harmon Drive
 Westbrook, Maine 04092

Consulting Engineer:
STRUCTURAL DESIGN CONSULTING
 2696 Lake Shore Road
 Unit 130
 Glenport, ME 04049
 Tel 603.293.8038

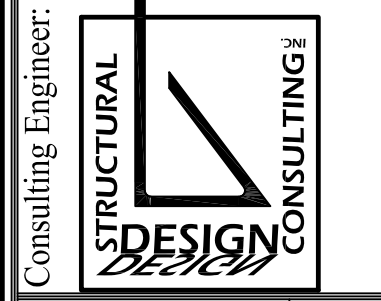

Architect:
ARCHETYPE architects
 48 Union Wharf Portland, Maine 04101
 (207) 772-6022 Fax (207) 772-4056

Project:
MILLBROOK ESTATES SENIOR HOUSING
 300 East Bridge Street
 Westbrook, Maine

Revisions:	09/01/15
90% MSHA Submission	01/04/16
Issued for Bid	

Date: 04 JAN 2016
 Scale: 1/8" = 1'-0"
FOURTH FLOOR FRAMING PLAN

S1.04