

ROOF FRAMING PLAN
 1/8" = 1'-0"

ROOF FRAMING MEMBERS ARE 18" TJI/360 SPACED AT 24" UNLESS NOTED OTHERWISE. NOTE THAT EXTRA LEAD TIME IS NEEDED FOR 18" TJI/360.

ROOF SHEATHING IS 5/8" ADVANTECH.

TOP OF SHEATHING ELEVATION = 113'-9"


TOP OF SHEATHING AT ELEV SHAFT = 118'-10 1/2"

BEARING WALLS ARE 2x6 @ 16"

BEARING WALL HEADERS ARE (3)2x8 WITH 2 JACK STUDS AT WINDOWS AND SINGLE DOORS UNLESS NOTED.

/////// INDICATES SHEARWALL. SEE S2.03.

SEE S0.01 FOR FRAMING HARDWARE SCHEDULE.

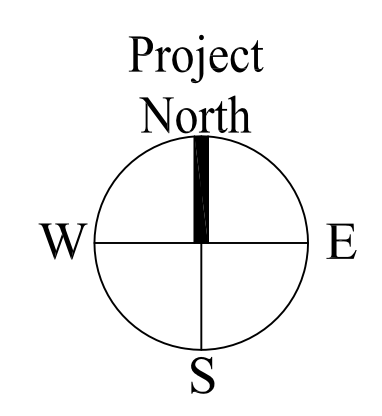

	Prepared For: WESTBROOK DEVELOPMENT CORPORATION MILLBROOK ESTATES II, LP 30 Liza Harmon Drive Westbrook, Maine 04092	Consulting Engineer: STRUCTURAL DESIGN CONSULTING 2696 Lake Shore Road Unit 130 Glenburn, ME 04249 Tel: 603.293.8038
	Architect: ARCHETYPE Architects 48 Union Wharf Portland, Maine 04101 (207) 772-6022 Fax (207) 772-4056	Project: MILLBROOK ESTATES SENIOR HOUSING 300 East Bridge Street Westbrook, Maine
Revisions: 90% MSHA Submission 09/01/15 Issued for Bid 01/04/16	Date: 04 JAN 2016	S1.05
Scale: 1/8" = 1'-0"	ROOF FRAMING PLAN	